

NetcamViewer Monitor

**View any IP-camera on your TV or Monitor
at a maximum resolution of 4K (3840 x 2160)**

Configurable Camera Sequence

HDMI Video Output



We support all big brands of IP-cameras. In total more than 600 brands and models.



View every IP-camera on a monitor or TV with a maximum resolution of 3840 x 2160.



With the sequence mode you can automatically change between different cameras.



Simple operation of all the functionality in NetcamViewer using your smartphone, tablet or PC.



Show up to nine (9) cameras in one screen to get the total overview. *



Show multiple cameras as picture-in-picture (PiP) view.



HTTP API Integration. Switch cameras and views using simple API-commands.

NetcamViewer Monitor displays all the images from an IP-camera on a monitor.
Both via HDMI (cable included)

Support for all famous and obscure brands of camera by selecting the brand or by direct input of the image URL. Also supports ONVIF cameras. Maximum resolution of 4K, depending on the brand and model of camera and available network capacity.


Applications

- Spot monitor at the entrance of shops
- Picture-in-Picture or full-screen on a standard TV (depending on the capabilities of the TV)

View any IP- camera on your Television or Monitor



Easy setup with your smartphone, tablet or laptop

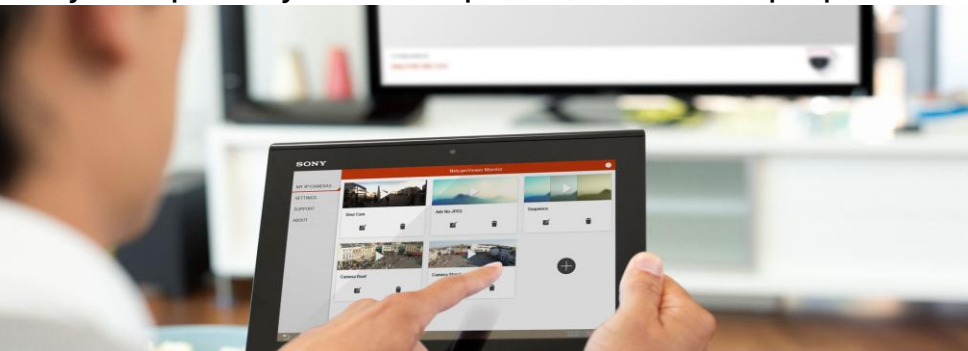

Display of a camera on a full screen or in sequence mode, where multiple cameras are shown in sequence on a full screen. This equipment can be configured via an intuitive interface from within a browser using a PC, MAC, smartphone or tablet. Connected to the network using Ethernet.

Can be mounted using an optional VESA-between-bracket, which is ordered separately. This bracket offers the option of permanent installation on a monitor, even if this is already mounted on a wall or ceiling using a VESA-bracket.

In the box



NetcamViewer Monitor



Power Supply



HDMI Cable

Available Accessories



Analog Video Adapter Cable

* With multiview, maximum 720P per camera stream

Specs

Display on a fullscreen of an H265 RTSP stream at 3840p/2160p 20fps, 1080p depending on brand and model of the camera and available network capacity.

Display on a full screen of (M)JPG at a lower frame rate, depending on the brand of camera / resolution / quality.

Multiview, display of up to 9 cameras simultaneously on the display.

Complete configuration using a browser. Support for mobile devices for simple configuration.

Manual expert-configuration for the display of any RTSP-, MJPEG-, or JPG (JPEG)-stream.

Manual expert-configuration for additional camera related API.

Functions

Multiview	Max. 9 cameras
Autostart	Autostart any view after boot
HTTP API	Switch cameras, views and advanced functions through API
Languages	Dutch, English, German

Video Outputs

Outputs	HDMI Composite Video (cable available separately)
HDMI Output	max: 3840x 2160

Audio

Audio Support	Depending on camera
Audio Outputs	HDMI Audio (Only available when using HDMI Video)

Network

Network interface	RJ45, 10/100mbit
IPv4 Support	Yes
Wireless	built-in 802.11ac

Power

Connection	USB C
Voltage / Current	5V DC, 3 Amp
Power Plugs	EU, US, AU, UK

Dimensions & Weight

Dimensions	91*69*36mm (l*b*h)
Weight	110 gramm

Package

Dimensions	125*235*75mm (l*b*h)
Weight	450 gramm